



### Smart look Day/Night Fixed Bullet Camera with IR illuminator

#### Key Features

- High resolution: 600 TV lines
- High sensitivity with Day/Night function: 0.6 lux (Color), 0 lux (B/W, IR LED is ON)
- IR LED equipped: The equipped infrared LED makes it possible to take pictures at zero lux
- Various video adjustment features including BLC (Back Light Compensation) and ATW (Auto Tracing White Balance)
- Digital Noise Reduction
- Adaptive Tone-curve Reproduction
- 2.8 - 12 mm, 4x Varifocal lens
- Wide coverage : Horizontal: 26° (Wide) - 90° (Wide), Vertical: 20° (Wide) - 68° (Tele)
- Privacy Zone can mask up to 4 private areas, such as house windows and entrances/exits
- Smart look fits for various applications such as shopping mall, hotels and hospitals
- IP66 rated water and dust resistant.


#### Standard Accessories

• Installation Guide .....	1 pc.
• Screw .....	4 pcs.
• Screw plug .....	4 pcs.
• L-Shaped Wrench .....	1 pc.

## Specifications

<b>TV System</b>		<b>WV-CPR604</b>
<b>Camera</b>	Image Sensor	1/3 type interline transfer CCD
	Effective Pixels	976 (H) x 582 (V)
	Scanning Mode	2:1 interlace
	Scanning Area	4.8 mm (H) x 3.6 mm (V)
	Scanning frequency	Horizontal: 15.625 kHz, Vertical: 50.00 Hz
	Horizontal Resolution	600 TV lines
	Minimum Illumination	Color: 0.6 lx, B/W: 0 lx (IR LED is ON) at F1.6
	IR LED Light	Auto
	IR LED irradiation distance	40 m
	Signal-to-Noise Ratio	> 48 dB
	White Balance	ATW, Anti Color Rolling, Manual
	Light Control	ELC
	AGC	ON / OFF
	Electronic Shutter	Auto, 1/50, 1/100, 1/250, 1/500, 1/1,000, 1/2,000, 1/4,000, 1/10,000
	Day & Night	Auto / B/W / Color
	Digital Noise Reduction	Auto
	Back Light Compensation	ON / OFF
	Adaptive Tone-Curve Reproduction	ON (Luminance:3steps, Contrast:5steps) / OFF
	Privacy Zone	up to 4 zones
	Camera Title	up to 52 alphanumeric characters (26x2)
Mirror image	ON / OFF	
Synchronization	Internal	
<b>Lens</b>	Focal Length	2.8 - 12 mm
	Angular Field of View	H: 26°(Tele) ~ 90°(Wide), V: 20°(Tele) ~ 68°(Wide)
<b>Input / Output</b>	Video Output	1.0 V [P-P] / 75 Ω, PAL composite video signal (BNC)
<b>General</b>	Setup Method	OSD setup menu
	Language	English, Russian, German, French, Spanish, Portuguese, Chinese, Japanese
	Safety/EMC Standard	CE (EN61000-6-3, EN50130-4, EN61000-3-2, EN61000-3-3) FCC (CFR 47 PART 15)
	Power Source and Power Consumption	12 V DC, 6W
	Ambient Operating Temperature	-10 ° C ~ +50 ° C (14 ° F ~ 122 ° F)
	Ambient Operating Humidity	85 % or less (without condensation)
	Water and Dust Resistance	IP66
	Dimensions	83 mm (W) x 175 mm (H) x 249 mm (L) (including bracket)
	Gross Weight (approx.)	1.07 kg
	External Case	Aluminum Alloy

## Appearance

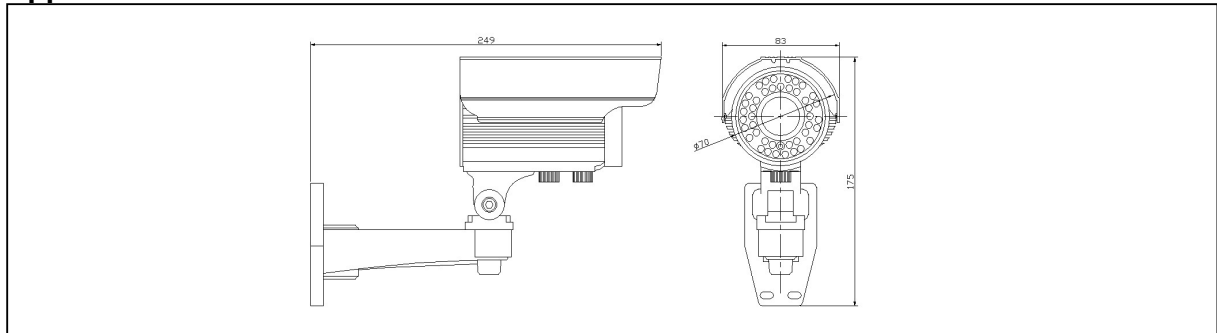

### Important

- Safety Precaution: carefully read the operating instructions and installation manual before using this product.

- All TV pictures are simulated.
- Weights and dimensions are approximate.
- Specifications are subject to change without notice.
- These products may be subject to export control regulations.

DISTRIBUTED BY: